



STOURFLEX®


J & P Supplies Ltd

Expansion Joints & Pipeline Equipment

Type JP 364 Spring Hangers.

Specification Spring hanger consisting of single helical steel spring, bonded into steel cap with visco-elastic resin. Fitted with noise reduction rubber spring housing.

Application Stourflex **Type JP 364** spring hangers are designed to reduce noise and vibration from suspended pipework and associated equipment such as fans, air handling units and pumps.

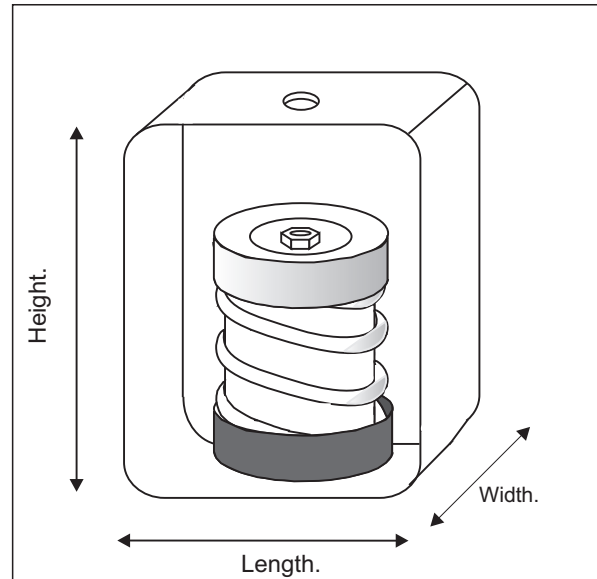

Part Number.	Maximum Load at 15mm Deflection. (Kg)	Maximum Load at 25mm Deflection. (Kg)	Length. (mm)	Width. (mm)	Height. (mm)	Top Clearance. Hole (mm)	Bottom Clearance. Hole (mm)
JP364 - 50	30	50	95	55	100	10	22
JP364 - 100	60	100	95	55	100	10	22
JP364 - 125	80	125	95	55	100	10	22

Part Number.	Maximum Load at 25mm Deflection. (Kg)	Maximum Load at 35mm Deflection. (Kg)	Length. (mm)	Width. (mm)	Height. (mm)	Top Clearance. Hole (mm)	Bottom Clearance. Hole (mm)
JP364 - 150	100	150	100	75	150	12	22
JP364 - 200	150	200	100	75	150	12	22
JP364 - 250	175	250	100	75	150	12	22
JP364 - 350	250	350	100	75	150	12	22
JP364 - 450	325	450	100	75	150	12	22

Where higher load ratings or greater deflections are required non standard variations of the **Type JP 362** spring hanger are available on request.

Stourflex spring hangers should be installed to equally distribute the load on suspended pipework and be fitted as close as possible to equipment or machinery requiring isolation.

Stourflex products should be installed in accordance with our fitting instructions.