



Type JP171 Suspended Pipe Anchor


Specification Electro-galvanized carbon steel pipe anchor consisting of a 2 part fixed point clamp complete with fixing kit. Plastic coated Carbon Steel and Stainless Steel anchor clamps are available for use with Copper and Stainless Steel Pipework

Application Stourflex pipe anchors are designed to provide the fixing points necessary when expansion joints are to be installed. The pipe anchor is a readily available alternative to fabricating and welding on site. The anchor can be supplied fully assembled or in kit form. The pipe anchor is suitable for floor, ceiling and wall mounted pipework installations. The JP171 pipe anchor is rated for loads up to 1kN and outside diameters up to 60mm.



Installation When fixing to the building structure 2 x M10 anchors are required.

Typical Example

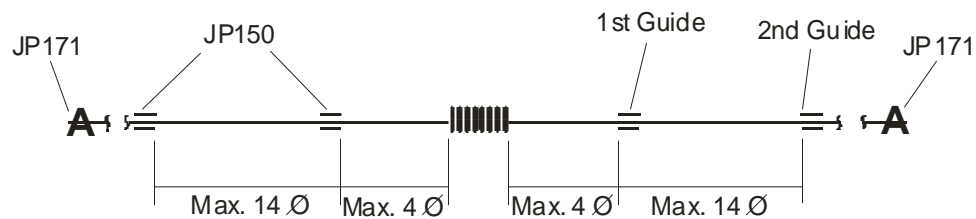

Typical pipework example showing installation where a Stourflex Axial Expansion joint is installed with **JP150** Expansion Joint guides and **JP171** Suspended Pipe Anchors.

Complete range of fixed point clamps available for ABS, PVC, CPVC, Copper, Stainless Steel and Carbon Steel pipework.

Type JP171 Suspended Pipe Anchor can be installed with sound absorbers when it is necessary to ensure that noise or vibration is not transmitted through the buildings structure.

Pipework containing expansion joints must be securely anchored and adequately guided to ensure the correct performance of the system. Omitting anchors and guides may result in failure of the system.

Where anchor loads exceed 1kN or pipe diameters are above 60mm please refer to the type JP170 or JP175 suspended pipe anchors.

Stourflex suspended pipe anchors should be installed in accordance with our fitting instructions.