




## Type JP365 Spring Hanger

**Specification** Spring hanger consisting of single helical steel spring, fitted inside zinc plated carbon steel top cone with neoprene rubber washer and base pad enclosed in a carbon steel frame with M12 x 125mm fixing levelling bolt.

**Application** Stourflex **Type JP365** spring hangers are designed to reduce noise and vibration from suspended pipework and associated equipment such as fans, air handling units and pumps.

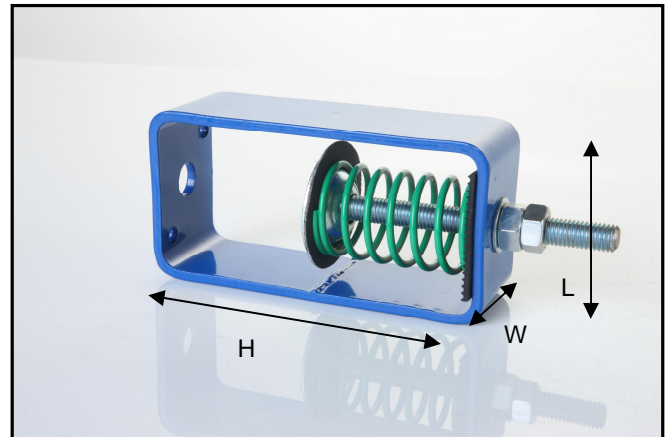

Part number	Maximum Load at 25mm Deflection (kg)	Maximum Load at 35mm Maximum Deflection (kg)	Length (mm)	Width (mm)	Height (mm)	Top Clearance Hole (mm)	Bottom Fixing Bolt (mm)
JP365 - 40	25	40	80	50	160	15	M12
JP365 - 50	35	50	80	50	160	15	M12
JP365 - 75	60	75	80	50	160	15	M12
JP365 - 125	90	125	80	50	160	15	M12
JP365 - 200	125	200	80	50	160	15	M12
JP365 - 375	250	375	80	50	160	15	M12
JP365 - 500	325	500	80	50	160	15	M12

Where higher load ratings or greater deflections are required non-standard variations of the **Type JP365** spring hanger is available on request.

Stourflex spring hangers should be positioned to equally distribute the load and deflection on suspended pipework or equipment in need of isolation. Spring hangers should also be equally spaced over a distance to meet the requirements of the specification.

Stourflex products should be installed in accordance with our fitting instructions.